


# 2706 - Four Slot, x16 PCI Express Expansion System

PCIe-426

PCIe Host Bus to PCIe x16 Expansion Cable Adapter
Four Slot, x16 PCI Express Expansion Backplane
PCI Express Expansion Chassis

- Four PCI Express Expansion Slots
- One x16
- One x8
- Two x4 Slots
- 40 Gb/s
   Bi-directional
   Expansion Cable
- Low Latency Reapter-Based Host Bus Adpater
- 650 Watt Power Supply

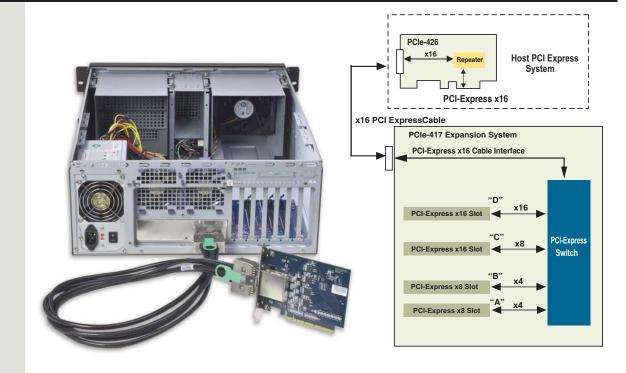





Cyclone Microsystems 370 James Street New Haven, CT 06513-3051 Call (203) 786-5536 information@cyclone.com

PCI Express Expansion System Data Sheet Dec 2007

Copyright 2007 Cyclone Microsystems. All Rights Reserved. All specifications subject to change without prior notice.

All names mentioned herein are trademarks of their respective holders.

The Cyclone Microsystems' 2706 PCI Express Expansion System is a x16 PCI Express (PCIe) Expansion System that allows a system developer to add up to four PCI Express cards. Most PCs contain few PCI Express slots making them poorly suited for embedded systems requiring a wealth of different I/O boards and co-processor resources.

The 2706 PCI Express Expansion Systems permits system developers to use powerful and cost-effective PCs as a foundation for a robust embedded system. All four expansion slots accommodate full length and full height cards and are cooled by three fans. Two slots, D and C, support double-width graphics cards. A 650 watt supply powers the rack-mounted expansion chassis.

The Expansion System's x16 PCI Express Expansion Cable supports 20 Gb/s bi-directional traffic to and from the host system and utilizes PCI Express x16 bus repeaters for low latency bus throughput. For PCs with modern BIOSs, the 2706 Expansion System is recognized by the host system upon boot-up, requires no hardware specific drivers, and is entirely host operating system agnostic.

The 600-2706 system is composed from three elements: a x16 PCI Express Host Bus Cable Adapter, an Expansion System Cable and an Expansion Chassis. Our PCIe-426 x16 PCIe Host Bus to Expansion Cable Adapter card is inserted into a host computer's x16 PCIe slot. The PCIe-426 does not support down-shifting and must be plugged in a x16 PCIe slot that is fully routed with x16 PCIe lanes. A x16 PCIe expansion cable links the PCI host with the PCIe-417 expansion backplane.

The 600-2706 was specifically develop to satisfy low latency system requirements for advanced graphics processing, geophysical workstations, and other demanding embedded applications.

PCI Express is a high performance, general purpose I/O inter-connect defined for a wide variety of computing and communication platforms. Key PCI attributes, such as its usage model, load-store architecture, and software interfaces are maintained, whereas its parallel bus implementation is replaced by a serial interface. PCI Express take advantage of recent advances in point-to-point inter-connects, switch-based technology, and packetized protocol to deliver new levels of performance.



PCI >>

RoHS

Compliant

## **2706 - Seven Slot PCI Express Expansion System**

PCIe-426 PCIe Host Bus to PCIe x16 Expansion Cable Adapter
PCIe-417 Four Slot, x16 PCI Express Expansion Backplane
600-2060 PCI Express Expansion Chassis

### PCIe-426 Host Bus to PCIe Expansion Cable Adapter

- PCI Express x16 Host Interface
- Low Latency PCI Express Bus Repeaters to x16 Expansion Cable
- Host Processor and Operating System Independent
- Standard Height Face Panel
- RoHS Compliant

### **PCIe-417 PCI Express Expansion Backplane**

- x16 Upstream Port
  - x16 PCI Express Cable Interface from Host
  - One or Three Meter Cable from Host
- Four PCIe Expansion Slots
  - x16 PCI Express Slot (Double Width x16 Connector)
  - x8 PCI Express Slot (Double Width x16 Connector)
  - x4 PCI Express Slot (Single Width x8 Connector)
  - x4 PCI Express Slot (Single Width x8 Connector)

- 48 Lane PCI Express Switch supporting:
- Peer-to-Peer Communications
- Non-Blocking Switch Fabric
- Data Integrity
- Quality of Service
- RoHS Compliant
- ATX Form Factor

### **600-2060 Expansion Chassis Specifications**

Physical	L9 Inch Rack Mount Enclosure     Power       U Height and 22 Inch Depth     Black Color       Rack Mount Flanges and Handles     Power		650 Watt Power Supply 100-240 VAC, 47-63 Hz Power Input +5V 30 A +12V 32 A -12V 0.3 A
<b>Board Slots</b>	Four Full Length PCI Express Slots		+3.3V 32 A +5VSB 2 A
Drive Bays	Three 5.25 Inch External Three/two 3.5 Inch External Locked Drive Bay Door		
Cooling	180 CFM Fans with Filter		

Environmental		PCIe-426	PCIe-417	
Physical Dimensions		PCI-Express Card Short Length	Mini ATX 11.2" x 8.2" (284mm x 208mm)	
			ATX 20 pin Power Supply Connector (Molex 39-29-9202 or equivalent) or BTX (24 pin) Power Supply Connector	
<b>Operating Temperatures</b>		0 to 55 Degrees Celsius	0 to 55 Degrees Celsius	
Relative Humidity		0 - 95%	0 - 95%	
Storage Temperatures		-55 to 125 Degree Celsius	-55 to 125 Degree Celsius	
Power Requirements (Watts)		1.00	0.33	
+3.3V Typical Maximum		1.09 1.60	0.40	
+5V	Typical Maximum	-	1.03 1.56	
+12V		0	0.02	
	Maximum	0	0.04	
-12V	Typical	_	-	
	Maximum	-	-	

Cyclone Microsystems 370 James Street New Haven, CT 06513-3051

PCI Express Expansion System Data Sheet Dec 2007 All specifications subject to change without prior notice.





# 2706 - Four Slot, x16 PCI Express Expansion System

PCIe-426 PCIe Host Bus to PCIe x16 Expansion Cable Adapter
PCIe-417 Four Slot, x16 PCI Express Expansion Backplane
PCI Express Expansion Chassis

### **2706 Component Boards**

### PCIe-426

**Host Bus to PCIe Expansion Cable Adapter** 





PCIe-417 PCI Express Expansion Backplane

### **PCI Express Expansion Chassis**







### Four Slot, x16 PCI Express Expansion System Ordering Information

600-2706-1	Four Slot, x16 PCI Ex	press Expansion System, One Meter Cable Including:	
	PCIe-426	PCI Express Host Bus to Expansion Cable Adapter	
	530-R2040	One Meter x16 PCIe Expansion Cable	
	PCIe-417	PCI Express Expansion Backplane	
	600-2060	Expansion Chassis	
600-2706-3	Four Slot, x16 PCI Express Expansion System, Three Meter Cable Including:		
	PCIe-426	PCI Express Host Bus to Expansion Cable Adapter	
	530-R2041	Three Meter x16 PCIe Expansion Cable	
	PCIe-417	PCI Express Expansion Backplane	
	600-2060	Expansion Chassis	
800-2706	600-2706 User's Manual		
800-0416	PCle-426 User's Manual		
800-0417	PCIe-417 User's Manual		

Cyclone Microsystems 370 James Street New Haven, CT 06513-3051

PCI Express Expansion System Data Sheet Dec 2007 All specifications subject to change without prior notice.

